


Dräger Flame 2500 Flame Detection

Working in areas with combustible gases, vapours or materials requires fire/ flame detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. The Dräger Flame 2500 features three infrared sensors to identify fire events with exceptional sensitivity and extreme immunity to false alarms.

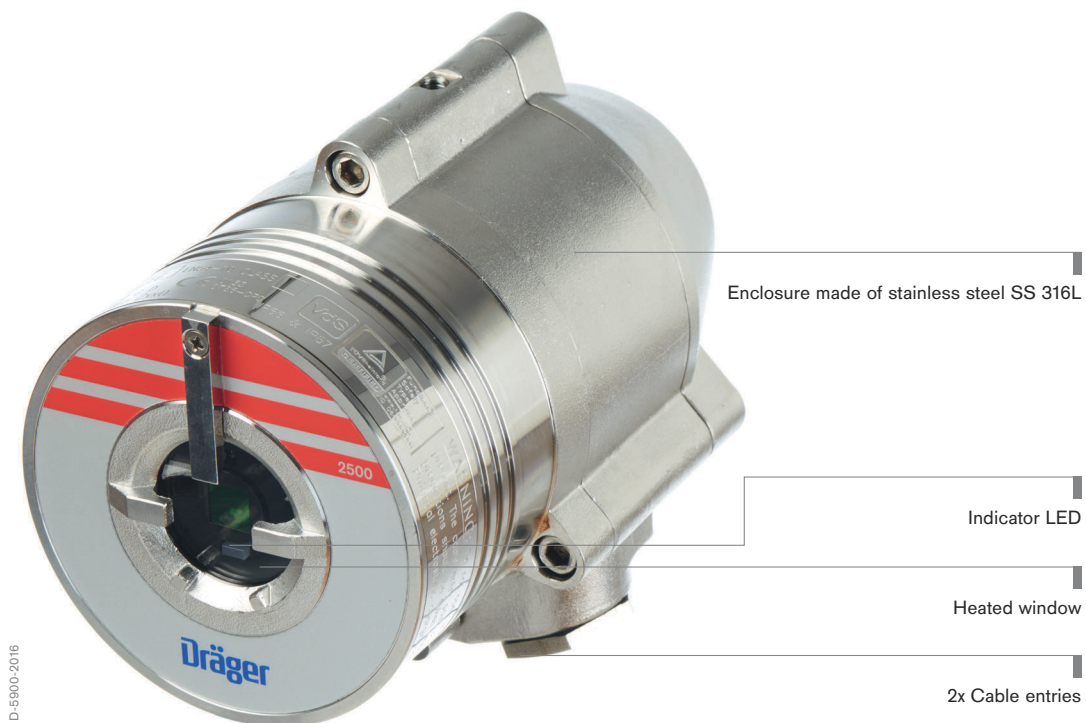

Benefits

Superior performance

The Dräger Flame 2500 combines exceptional reliability with tough design and easy handling. Its multi-spectrum setup is based on three IR bands (IR3) and can quickly detect and report fuel and gas fires at considerably long distances. Its high degree of operational flexibility and compatibility with other systems and interfaces makes it ideal for a large number of applications.

Immunity to false alarms

Common sources of unwanted alarms such as hotworks, hot CO₂ emissions, and flare reflections are no longer a problem with the Flame 2500. Additionally, its sensitivity selection ensures that there is no zone crossover detection.

Tough & durable

As one of the most weather resistant detectors currently on the market, the Flame 2500 is built to effortlessly function under various conditions. New features such as its heated window effectively eliminate icing and condensation problems.

Nothing unnoticed

The Dräger Flame 2500 offers quick and accurate flame detection. With a MTBF minimum of 150,000 hours and the ability to detect a 1 ft² (0.1 m²) gasoline pan fire at 213 ft (65 m) in less than 5 seconds, you can be sure that the safety of your operations and your workers are in great hands.

Reliability

Functional safety is a concept applicable across all industry sectors. It is fundamental to enabling complex technology and provides assurance that the safety-related systems will offer necessary risk reduction. The Dräger Flame 2500 is highly reliable and complies with the IEC 61508 Safety Integrity Requirements of SIL2.

Automatic and manual optics checks (BIT)

Automatic checks of the detector electronics and optics increases reliability. Additionally, the test can be triggered manually at any time.

Easily visible status LED

A tri-colored LED on the front of the detector provides a simple status indication to personnel in close proximity. Green indicates normal operation, yellow indicates a fault, and red indicates the presence of a fire.

Benefits

Simple installation and commissioning

Installation is simple! The detector is easily installed with a stainless steel tilt mount, enabling the detector to be rotated up to 60 degrees in all directions. This offers flexibility in positioning the detector in relation to potential fire sources.

Further benefits and features:

- Multi spectrum design—for long distance detection and high false alarm immunity
- Advanced Digital Processing of the Dynamic Characteristics of Fire (flickering, threshold correlation, and ratio)
- Sensitivity selection—to ensure no zone crossover detection
- Automatic and Manual Built-In-Test (BIT)—to assure continued reliable operation
- Heated window—for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
- 3 Relays for Alarm, Fault and Auxiliary
- 0–20 mA (stepped)
- HART ® Protocol for maintenance and asset management
- RS-485, Modbus compatible
- Approved to Safety Integrity Level 2 (SIL2—TÜV)
- Ex approvals for worldwide application: ATEX, IECEx, FM/FMC, CSA
- 3rd party performance tested: EN54-10 (VdS), FM3260

Accessories



D-51319-2015

Flame Simulator

The Flame Simulator emits radiation in a unique sequential pattern corresponding to and recognizable by the detector as fire. This allows the detectors to be tested under simulated fire conditions without the associated risks of an open flame.



D-5921-2016

Weather Cover

The Weather Cover protects the detector from different weather conditions, such as snow or rain.



D-5925-2016

Laser Pointer

Does the detector cover the area that needs protection? Is it located correctly? Does the detector's cone of vision cover the most dangerous spot? This accessory enables the installer to optimise detector location and its actual detection area coverage.



D-5926-2016

Air Shield

The Air Shield allows the installation of the Dräger Flame 2000 series detectors under tough environmental conditions where they may be exposed to oil vapors, sand, dust and other particulate matter.

Services



D-19072-2016

Dräger Service

When your operation's safety equipment is backed by over 125 years of experience and supported by the same team that engineered it, you can rely on service and rental solutions that are tailored to meet your unique needs. With Dräger's safety solutions, you get complete peace of mind, budget security, and full-service support that you can count on every step of the way. That's the Dräger Service Advantage.

Related Products



D-5904-2016

Dräger Flame 2000

Working in areas with combustible gases, vapors, or materials requires fire/flare detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. Flame 2000 uses an advanced infrared (IR) and optical sensor to provide maximum sensitivity to carbon dioxide spectral bands.



D-5903-2016

Dräger Flame 2100

Working in areas with combustible gases, vapors, or materials requires fire/flare detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. The Dräger Flame 2100 is a single spectrum optical detector using an ultra-violet sensor to detect flames, while eliminating interference from solar-radiation and other non-fire UV sources.

Related Products



Dräger Flame 2350

Working in areas with combustible gases, vapors, or materials requires fire/flare detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. The Dräger Flame 2350 is a dual spectrum optical detector, using a combination of ultra-violet and infrared sensors to detect fires at a high speed response time of 200 milliseconds.



Dräger Flame 2370

Working in areas with combustible gases, vapors, or materials requires fire/flare detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. The Dräger Flame 2370 is a dual spectrum optical detector, using a combination of ultra-violet and infrared sensors to detect fires at a high speed response time of 20 milliseconds.



Dräger Flame 2700

Working in areas with combustible gases, vapor, or materials requires fire/flare detection as a life-saving necessity. The best solutions must combine state-of-the-art technology with rugged durability and be ready to reliably work in any situation. The Dräger Flame 2700 multi-IR incorporates several detection algorithms to simultaneously detect both CO₂ and H₂O peaks, and reduce false alarms.

Technical Data

Type	Explosion proof IR flame detector for hydrocarbon based fires	
Spectral response	Three IR Bands 4 to 5 μm	
Measuring Performance	Field of view	Horizontal 100°; Vertical 95°
	Response Time	Typically 5 seconds
	Sensitivity Ranges	4 Sensitive ranges for 1 ft ² (0.1 m ²) n-heptane pan fire from 50 ft (15 m) to 215 ft (65 m)
Detection Range	Fuel	ft / m
(at highest Sensitivity Setting for 1 ft ² (0.1 m ²) pan fire)	n-Heptane / Gasoline	215 / 65
	Diesel Fuel / JP5 / Kerosene	150 / 45
	Ethanol 95 %	135 / 40
	Methanol	115 / 35
	IPA (Isopropyl Alcohol)	135 / 40
	Methane / LPG*	150 / 45
	Polypropylene Pellets	115 / 35
	Office Paper	83 / 25
* 30" (0.75 m) high, 10" (0.25 m) width plume fire		

Electrical Data

Output Signals	0 – 20 mA (stepped), HART®
Fault Signal	0 + 1 mA
BIT Fault Signal	2 mA \pm 10 %
Normal Signal	4 mA \pm 10 %
Warning Signal	16 mA \pm 5 %
Alarm Signal	20 mA \pm 5 %
Relays	Alarm, Fault and Auxiliary SPST volt-free contacts rated 2 A at 30 VDC
RS485	Modbus compatible communication link
Power supply	24 VDC nominal (18 – 32 VDC)
Power Consumption	Standby: Max. 90 mA (110 mA with heated window) Alarm: Max. 130 mA (160 mA with heated window)

Ambient Conditions

Temperature	-55 to +75 °C / -67 to +167 °F (operating) -55 to +85 °C / -67 to +185 °F (option and storage)
Humidity	Up to 95 % non-condensing (withstands up to 100 % RH for short periods)

Enclosure

Material	Stainless steel SS 316L
Material option (only available with ATEX approved versions)	heavy duty copper free aluminum, red epoxy enamel finish
Connecting thread	2 x 3/4" – 14 NPT or 2 x M25 x 1.5 mm
Weight	Detector SS 316L 2.8 kg / aluminum 1.3 kg Tilt mount 1.0 kg
Dimensions Detector	101.6 x 117 x 157 mm
Ingress Protection	IP66 and IP67, NEMA 250 6P

Approvals

ATEX and IECEx	Ex II 2 G D		
	Ex d e IIC T5 Gb	Ex d e IIC T4 Gb	Ex d e mb IIC T4 Gb
	Ex tb IIIC T96°C Db	Ex tb IIIC T106°C Db	Ex tb IIIC T98°C Db
	(-55 °C \leq Ta \leq +75 °C)	(-55 °C \leq Ta \leq +85 °C)	(Ta = -55 °C to +75 °C)

Technical Data

FM/FMC/CSA	Class I Div. 1, Groups B, C & D
	Class II/III Div. 1, Groups E, F & G
Safety Integrity Level	SIL2 certified by TÜV (EN61508)
Performance Approval	EN54-10 (VdS)
	FM3260
CE marking	EMI/RFI protected to EN61326-3 and EN61000-6-3

Ordering Information

Dräger Flame 2500 (IR3-112SF)	68 13 952
Dräger Flame 2500 (IR3-212SF)	68 13 953
Dräger Flame 2500 (IR3-222SF)	68 13 954
Dräger Flame 2500 (IR3-312SF)	68 13 955
Dräger Flame 2570 (UFI-212SF)	68 14 009
Accessories	
Flame Simulator FS-1100 (IR3)	68 13 973
Dräger Flame 2xx0 Air Shield	68 13 977
Dräger Flame 2xx0 Duct Mount	68 13 978
Tilt Mount Flame Detector	68 13 979
Weather cover Flame Detector (SS)	68 13 189
Weather cover Flame Detector (ABS)	68 13 190
Dräger Flame 2xx0 Laser Pointer	68 13 890
Dräger Flame Pole Mount 3"	68 13 323
Dräger Flame Pole Mount 2"	68 13 322
Dräger Flame USB RS-485 Kit	68 13 994
Battery Pack for Flame Simulator FS1x00	68 13 889
HART® is a registered trademark of the HART® Communication Foundation	

Not all products, features, or services are for sale in all countries.

Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS
 Drägerwerk AG & Co. KGaA
 Moislinger Allee 53–55
 23558 Lübeck, Germany
www.draeger.com

Customer Service:
 USA
 +1 800-4DRAGER
 (+1 800-437-2437)

CANADA
 +1 877-DRAGER1
 (+1 877-372-4371)

Technical Service:
 USA
 +1 800-4DRAGER
 (+1 800-437-2437)

Locate your Regional
 Sales Representative at:
www.draeger.com/contact

